

Hawa Divido for wooden sliding walls

One system, countless possibilities





Wooden sliding walls are naturally predestined for making rooms usable in a flexible way. And the Hawa Divido partition wall system ensures there are few limits to your design options. Wooden sliding walls can be implemented with top or bottom running, fitted to the walls or the ceiling, fitted perfectly into sloping ceilings and, move synchronously and provide full accessibility – all with the same system. Then come the sophisticated additions such as the stacking system which has been specially developed for Hawa Divido. It allows large openings to be closed with several narrow elements rather than one wide sliding element and then park them in a very small space. It isn't just the technology which is elegant with Hawa Divido: With its clean design, low installation height, attractive panels and wide range of design options, it looks good in every respect.







Area of application

Variable use of space and privacy in offices and residential areas, such as retirement homes, public buildings, detached houses and apartment blocks with a high construction standard, and also hotels.

System advantages

-  **Flexibility** **Stacking, synchronized solutions and sloping ceilings** based on standard systems
-  **Productivity** Productive installation thanks to **minimum number of adjusting and screw-on locations, easy adaptation to sloping ceilings**
-  **Comfort** **Smooth, quiet door sliding** thanks to high-performance running gears with precision ball bearings
-  **Aesthetics** **Technology integrated in the running track and minimal installation height** make design options for every requirement possible


Technical specifications

-  Max. 80/100 kg
-  Max. 2400 mm
-  Max. 1200/2000 mm
-  28–30 mm

Good to know (accessories)

- Stacking system
- Sloping ceilings
- Soft and self closing mechanism (Additional for two synchronously running doors)
- 4-point guidance

Installation examples

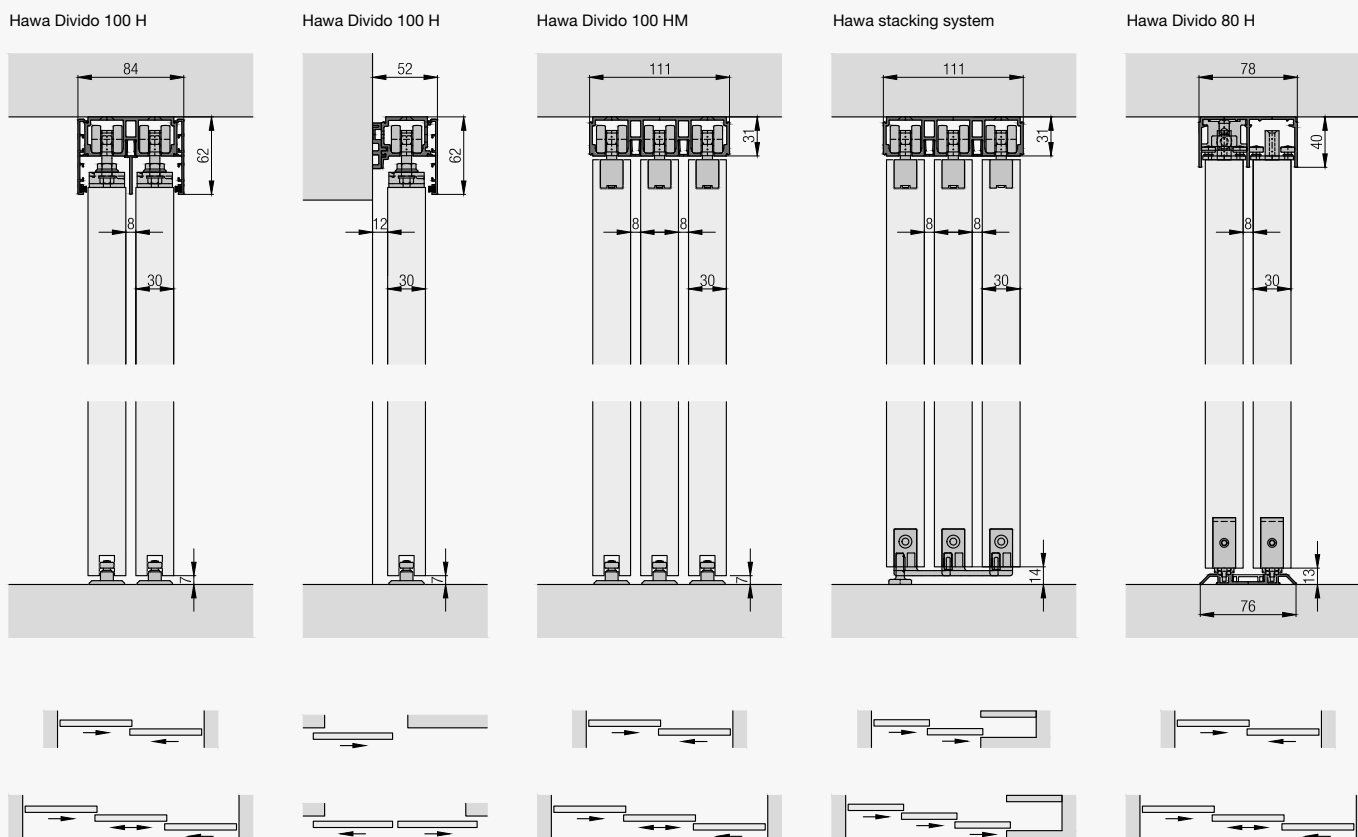

Product range

- Hawa Divido 100 H
- Hawa Divido 100 H
- Hawa Divido 100 HM
- Hawa stacking system
- Hawa Divido 80 H


Fitting for bottom-running wooden doors up to 80 kg (176 lbs.), with surface or recess mounted running track. With soft and self closing mechanism.

Product highlights


- Flexibility** One, two or three track system for doors or room dividers
- Productivity** Multi-track guide and running tracks reduce installation cost

Technical specifications

- Max. 80 kg (176 lbs.)
- Max. 2400 mm (7' 10 7/16")
- Max. 2000 mm (6' 6 3/4")
- 28–30 mm (1 3/32" to 1 3/16")

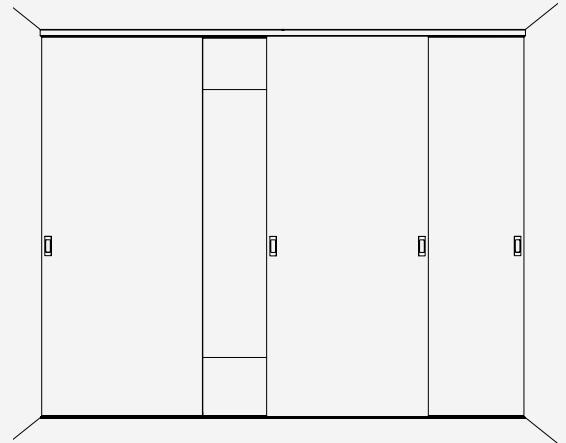





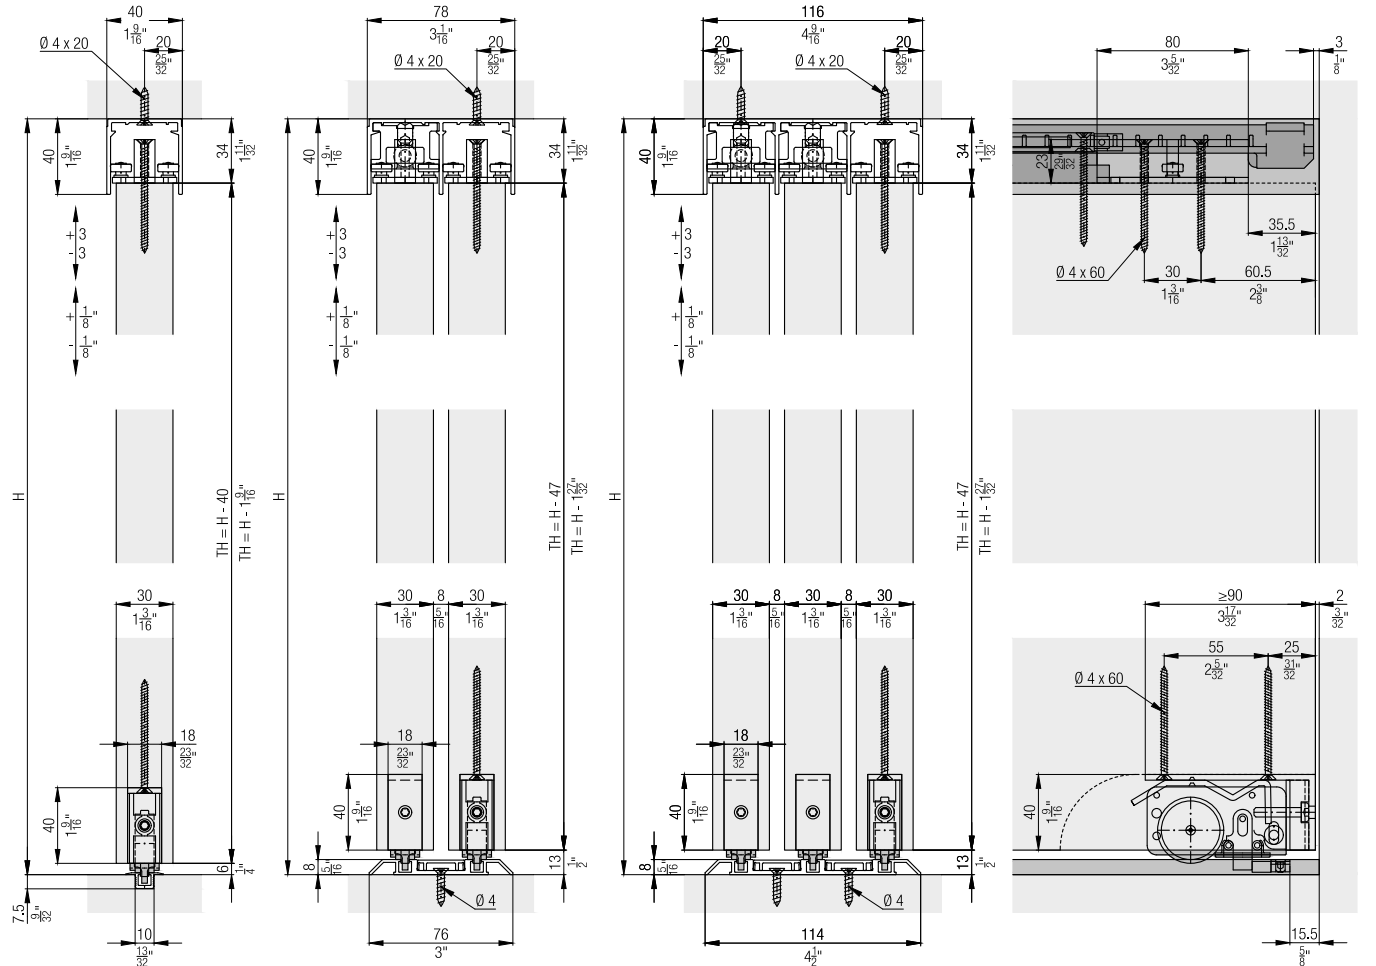


Installation examples



Set for 1 wooden door up to 80 kg (176 lbs.)

	No.
Hawa Divido 80 H, for 1 door	042.3026.075



		042.3026.075	No.
Set consisting of:			

	Running gear, bottom running, steel	2	042.3018.071
	Adapter for wooden door, plastic, anthracite	2	042.3036.001
	Flat countersunk head chipboard screw, 4x60 mm (5/32"x2 3/8"), steel, zinc-plated	4	600.0000.139
	Stopper to running track Hawa Divido 80, plastic, grey	2	042.3008.071
	Soft closing gum, plastic, grey	2	042.0126.001
	Track end piece, plastic, grey	1	042.3046.001
	Set top guide	1	042.3032.172
	Stopper to guide track, plastic, grey	2	042.3012.071




Running tracks (overview on page 535)

		mm (inch)	No.
	Running track, aluminum, anodized, flush mounted	6,000 (19' 8 7/32")	042.3089.600
		cut to size	042.3089.990
	Single running track for 042.3039., aluminum, anodized	2,500 (8' 2 7/16")	042.3037.250
		3,500 (11' 5 25/32")	042.3037.350
		6,000 (19' 8 7/32")	042.3037.600
		cut to size	042.3037.990
	Mounting track for 042.3037., aluminum, anodized	6,000 (19' 8 7/32")	042.3039.600
		cut to size	042.3039.990
	Single running track, aluminum, anodized, surface mounted	6,000 (19' 8 7/32")	042.3040.600
		cut to size	042.3040.990
	Double running track, aluminum, anodized, pre-drilled, surface mounted	6,000 (19' 8 7/32")	042.3041.600
		cut to size	042.3041.990
	Single running track, for glue fixing, aluminum, anodized, surface mounted	6,000 (19' 8 7/32")	042.3080.600
		cut to size	042.3080.990
	Double running track, aluminum, anodized, pre-drilled, surface mounted	6,000 (19' 8 7/32")	042.3081.600
		cut to size	042.3081.990
	Triple running track, aluminum, anodized, pre-drilled, surface mounted	6,000 (19' 8 7/32")	042.3082.600
		cut to size	042.3082.990
	Clip cover for 042.3039./042.3041./042.3081./042.3082., aluminum, anodized	6,000 (19' 8 7/32")	042.3038.600
		cut to size	042.3038.990

Track end piece set for single running tracks

		No.
	Track-end piece to 042.3089., plastic, gray, 2-piece set	042.3090.081
	Track-end piece to 042.3080., plastic, gray, 2-piece set	042.3087.081








Guide tracks

		mm (inch)	No.
	Single guide track, aluminum, anodized	2,500 (8' 2 7/16")	042.3049.250
		3,500 (11' 5 25/32")	042.3049.350
		6,000 (19' 8 7/32")	042.3049.600
		cut to size	042.3049.990
	Double guide track, aluminum, anodized, flush mounting	2,500 (8' 2 7/16")	042.3011.250
		3,500 (11' 5 25/32")	042.3011.350
		6,000 (19' 8 7/32")	042.3011.600
		cut to size	042.3011.990
	Triple guide track, aluminum, anodized	6,000 (19' 8 7/32")	042.3085.600
		cut to size	042.3085.990


Soft close

**For soft closing in opening and closing direction
order 2 sets.**

	No.
Soft close Hawa Divido 80, 61–80 kg (133 to 176 lbs.), 1 piece	042.3103.071
Soft close Hawa Divido 80, 10–60 kg (22 to 132 lbs.), 1 piece	042.3103.072


		042.3103.071	042.3103.072	No.
Set consisting of:				
	Soft close, bottom running, 61–80 kg (134 to 176 lbs.), plastic	1		042.3107.071
	Damper support, bottom running, plastic	1	1	042.3108.001
	Support bracket, bottom running, steel, zinc-plated	1	1	042.3110.101
	Stopper with trigger, plastic	1	1	042.3109.071
	Flat countersunk head chipboard screw, 4x60 mm (5/32"x2 3/8"), steel, zinc-plated	2	2	600.0000.139
	Cross recessed flat countersunk head screw, M4x50 mm (5/32"x1 31/32"), steel, zinc-plated	2	2	600.0000.492
	Soft close, bottom running, 10–60 kg (22 to 132 lbs.), plastic		1	042.3107.072

Wall compensation profiles


		mm (inch)	No.
	Wall compensation profile, with sealing profile gray, aluminum, anodized	2,500 (8' 2 7/16")	042.3064.071
		3,000 (9' 10 1/8")	042.3064.072

Intermediate stop


**(cannot be used in conjunction with
soft closing mechanism)**

	No.
	042.3031.071


Further installation examples

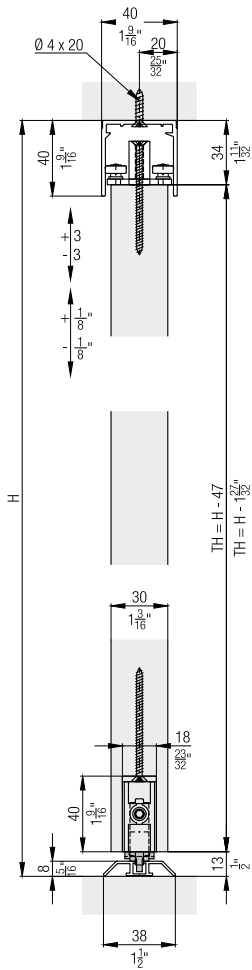


Calculations

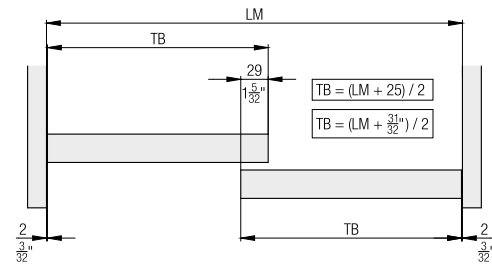


Wall compensation profile




Installation examples running tracks

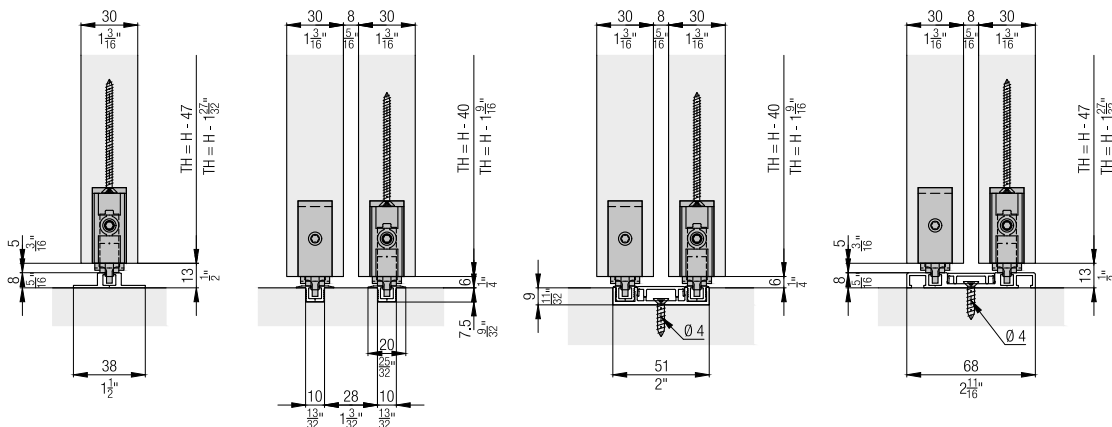

Overview running tracks

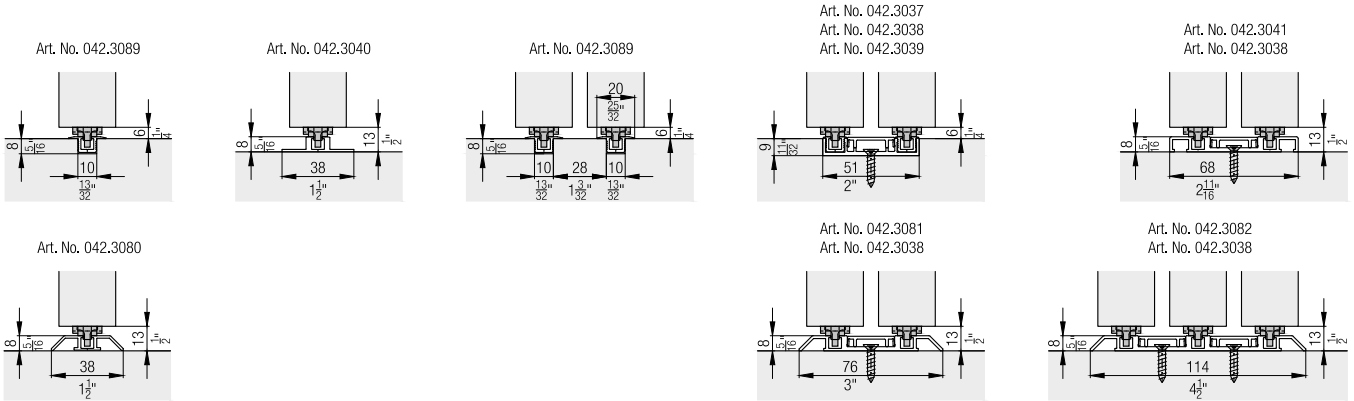

Soft close

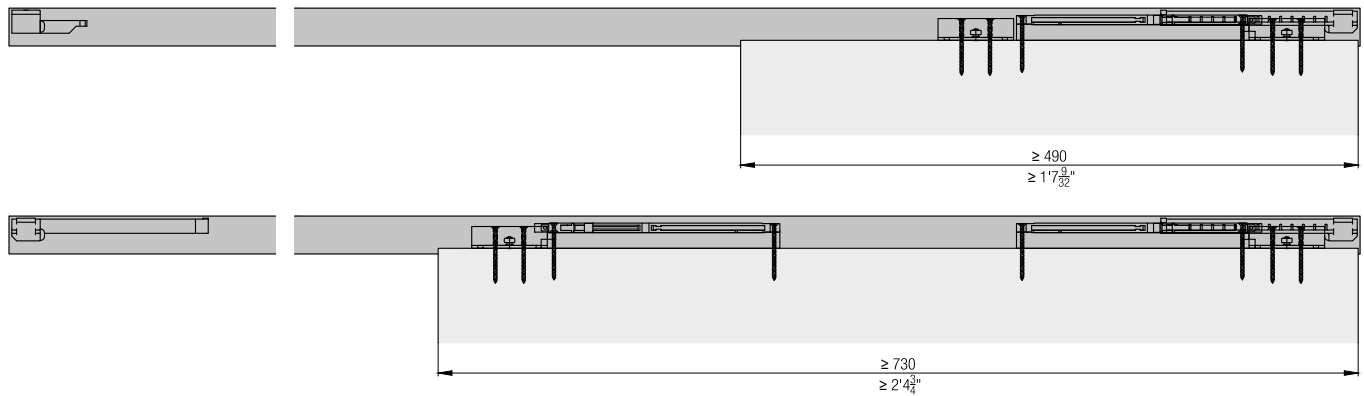

Accessories



– Hawa Divido overview from page 535

Planning/execution





Further information about the product can be found on www.hawa.com.


Fitting for bottom-running wooden doors up to 80 kg (176 lbs.), with surface or recess mounted running track. System for sloping ceilings.

Product highlights


-  **Flexibility** Two track systems can also be implemented in sloping ceilings as room dividers
-  **Comfort** Smooth running thanks to high-quality ball bearings

Technical specifications

-  Max. 80 kg (176 lbs.)
-  Max. 2400 mm (7' 10 7/16")
-  Max. 2000 mm (6' 6 3/4")
-  28–30 mm (1 3/32" to 1 3/16")

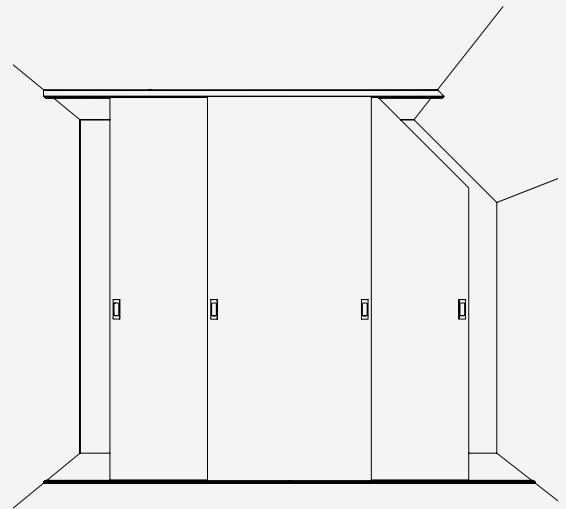

Installation examples

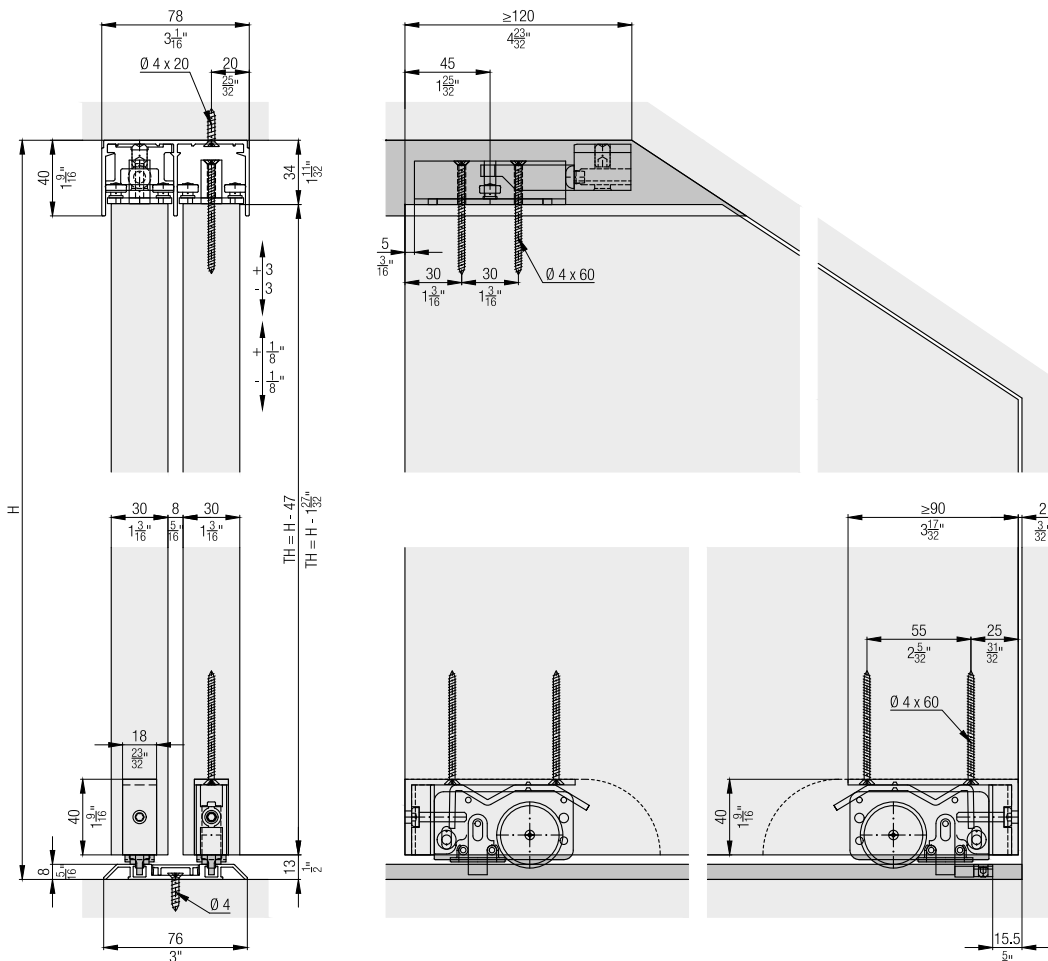

Set for 1 wooden door up to 80 kg (176 lbs.)

	No.
Hawa Divido 80 H, for 1 door	042.3026.075


		042.3026.075	No.
Set consisting of:			

	Running gear, bottom running, steel	2	042.3018.071
	Adapter for wooden door, plastic, anthracite	2	042.3036.001
	Flat countersunk head chipboard screw, 4x60 mm (5/32"x2 3/8"), steel, zinc-plated	4	600.0000.139
	Stopper to running track Hawa Divido 80, plastic, grey	2	042.3008.071
	Soft closing gum, plastic, grey	2	042.0126.001
	Track end piece, plastic, grey	1	042.3046.001
	Set top guide	1	042.3032.172
	Stopper to guide track, plastic, grey	2	042.3012.071



Running tracks (overview on page 535)

		mm (inch)	No.
	Running track, aluminum, anodized, flush mounted	6,000 (19' 8 7/32")	042.3089.600
		cut to size	042.3089.990
	Single running track for 042.3039., aluminum, anodized	2,500 (8' 2 7/16")	042.3037.250
		3,500 (11' 5 25/32")	042.3037.350
		6,000 (19' 8 7/32")	042.3037.600
		cut to size	042.3037.990
	Mounting track for 042.3037., aluminum, anodized	6,000 (19' 8 7/32")	042.3039.600
		cut to size	042.3039.990
	Single running track, aluminum, anodized, surface mounted	6,000 (19' 8 7/32")	042.3040.600
		cut to size	042.3040.990
	Double running track, aluminum, anodized, pre-drilled, surface mounted	6,000 (19' 8 7/32")	042.3041.600
		cut to size	042.3041.990
	Single running track, for glue fixing, aluminum, anodized, surface mounted	6,000 (19' 8 7/32")	042.3080.600
		cut to size	042.3080.990
	Double running track, aluminum, anodized, pre-drilled, surface mounted	6,000 (19' 8 7/32")	042.3081.600
		cut to size	042.3081.990
	Clip cover for 042.3039./042.3041./042.3081./042.3082., aluminum, anodized	6,000 (19' 8 7/32")	042.3038.600
		cut to size	042.3038.990


Track end piece set for single running tracks

		No.
	Track-end piece to 042.3089., plastic, gray, 2-piece set	042.3090.081


Guide tracks

		mm (inch)	No.
	Single guide track, aluminum, anodized	2,500 (8' 2 7/16")	042.3049.250
		3,500 (11' 5 25/32")	042.3049.350
		6,000 (19' 8 7/32")	042.3049.600
		cut to size	042.3049.990
	Double guide track, aluminum, anodized, flush mounting	2,500 (8' 2 7/16")	042.3011.250
		3,500 (11' 5 25/32")	042.3011.350
		6,000 (19' 8 7/32")	042.3011.600
		cut to size	042.3011.990


Wall compensation profiles

		mm (inch)	No.
	Wall compensation profile, with sealing profile gray, aluminum, anodized	2,500 (8' 2 7/16")	042.3064.071
		3,000 (9' 10 1/8 ")	042.3064.072


**Intermediate stop
(cannot be used in conjunction with
soft closing mechanism)**

		No.
	Intermediate stop, plastic, gray	042.3031.071


Installation examples running tracks

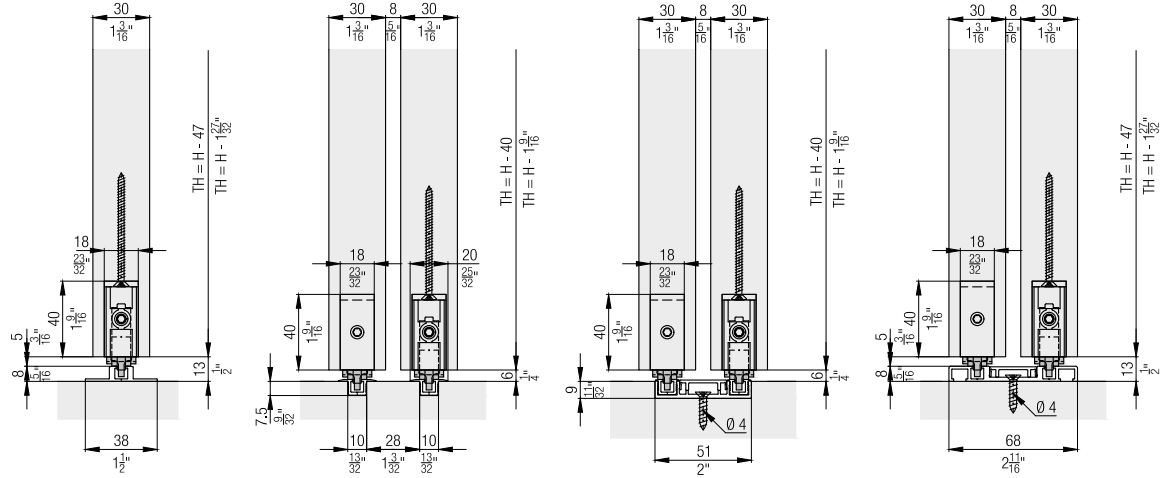

Overview running tracks

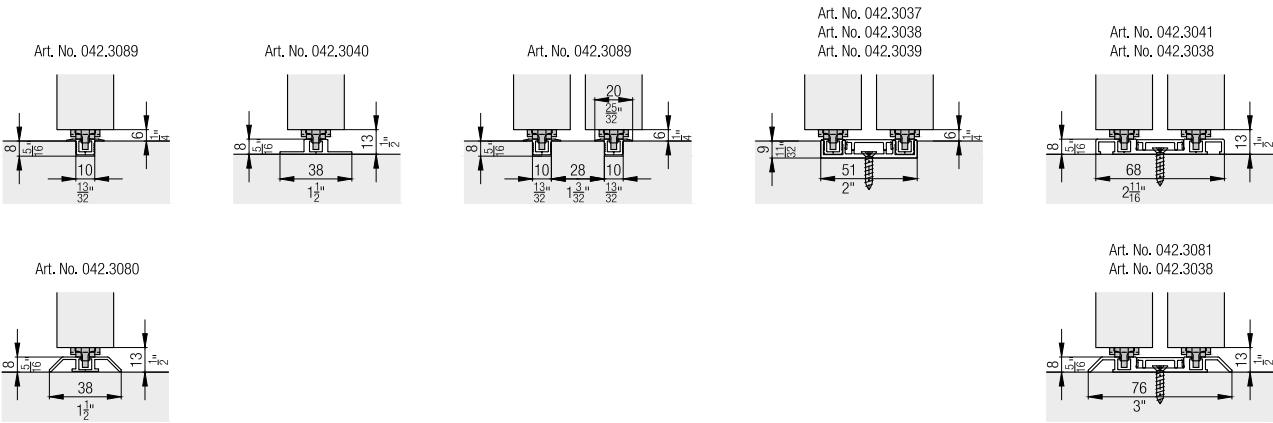

Wall compensation profile



Accessories



– Hawa Divido overview from page 535

Planning/execution





Further information about the product can be found on www.hawa.com.


Fitting for bottom-running wooden doors up to 80 kg (176 lbs.), with surface or recess mounted running track. System for sloping ceilings.

Product highlights


-  **Flexibility** Two track systems can also be implemented in sloping ceilings as room dividers
-  **Comfort** Smooth running thanks to high-quality ball bearings

Technical specifications

-  Max. 80 kg (176 lbs.)
-  Max. 2400 mm (7' 10 7/16")
-  Max. 2000 mm (6' 6 3/4")
-  30 mm (1 3/16")

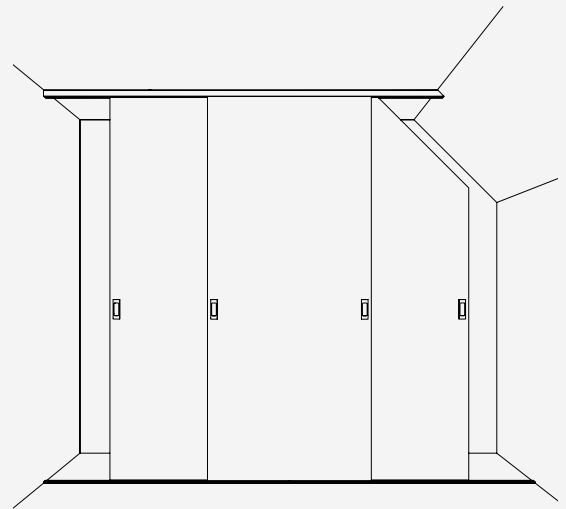



Installation examples

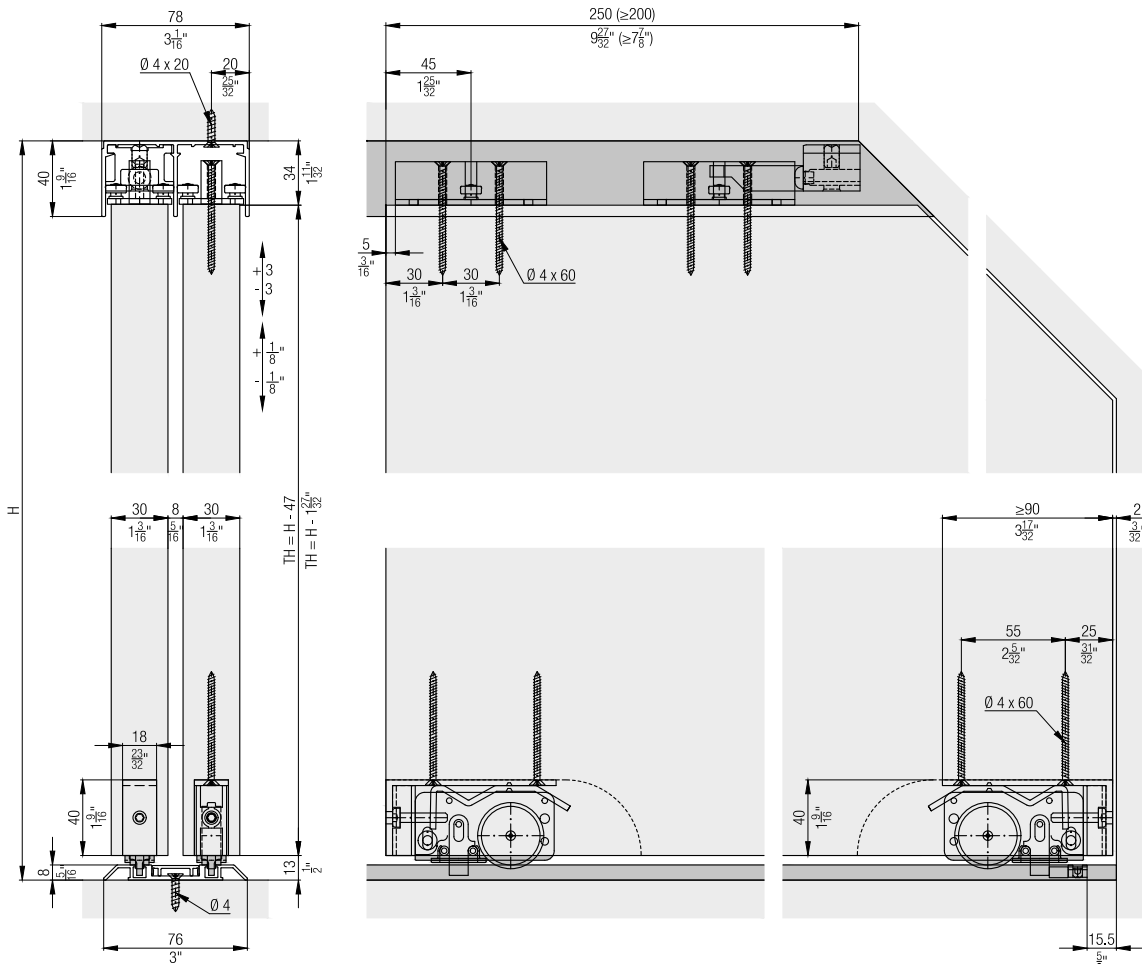

Set for 1 wooden door up to 80 kg (176 lbs.)

	No.
Hawa Divido 80 H, for 1 door	042.3026.075


Set consisting of:

		042.3026.075	No.
	Running gear, bottom running, steel	2	042.3018.071
	Adapter for wooden door, plastic, anthracite	2	042.3036.001
	Flat countersunk head chipboard screw, 4x60 mm (5/32"x2 3/8"), steel, zinc-plated	4	600.0000.139
	Stopper to running track Hawa Divido 80, plastic, grey	2	042.3008.071
	Soft closing gum, plastic, grey	2	042.0126.001
	Track end piece, plastic, grey	1	042.3046.001
	Set top guide	1	042.3032.172
	Stopper to guide track, plastic, grey	2	042.3012.071



Running tracks (overview on page 535)

		mm (inch)	No.
	Running track, aluminum, anodized, flush mounted	6,000 (19' 8 7/32")	042.3089.600
		cut to size	042.3089.990
	Single running track for 042.3039., aluminum, anodized	2,500 (8' 2 7/16")	042.3037.250
		3,500 (11' 5 25/32")	042.3037.350
		6,000 (19' 8 7/32")	042.3037.600
		cut to size	042.3037.990
	Mounting track for 042.3037., aluminum, anodized	6,000 (19' 8 7/32")	042.3039.600
		cut to size	042.3039.990
	Single running track, aluminum, anodized, surface mounted	6,000 (19' 8 7/32")	042.3040.600
		cut to size	042.3040.990
	Double running track, aluminum, anodized, pre-drilled, surface mounted	6,000 (19' 8 7/32")	042.3041.600
		cut to size	042.3041.990
	Single running track, for glue fixing, aluminum, anodized, surface mounted	6,000 (19' 8 7/32")	042.3080.600
		cut to size	042.3080.990
	Double running track, aluminum, anodized, pre-drilled, surface mounted	6,000 (19' 8 7/32")	042.3081.600
		cut to size	042.3081.990
	Clip cover for 042.3039./042.3041./042.3081./042.3082., aluminum, anodized	6,000 (19' 8 7/32")	042.3038.600
		cut to size	042.3038.990

Track end piece set for single running tracks

		No.
	Track-end piece to 042.3089., plastic, gray, 2-piece set	042.3090.081








Guide tracks

		mm (inch)	No.
	Single guide track, aluminum, anodized	2,500 (8' 2 7/16")	042.3049.250
		3,500 (11' 5 25/32")	042.3049.350
		6,000 (19' 8 7/32")	042.3049.600
		cut to size	042.3049.990
	Double guide track, aluminum, anodized, flush mounting	2,500 (8' 2 7/16")	042.3011.250
		3,500 (11' 5 25/32")	042.3011.350
		6,000 (19' 8 7/32")	042.3011.600
		cut to size	042.3011.990


Soft close

**For soft closing in opening and closing direction
order 2 sets.**

		No.
Soft close Hawa Divido 80, 61–80 kg (133 to 176 lbs.), 1 piece		042.3103.071
Soft close Hawa Divido 80, 10–60 kg (22 to 132 lbs.), 1 piece		042.3103.072


		042.3103.071	042.3103.072	No.
Set consisting of:				
	Soft close, bottom running, 61–80 kg (134 to 176 lbs.), plastic	1		042.3107.071
	Damper support, bottom running, plastic	1	1	042.3108.001
	Support bracket, bottom running, steel, zinc-plated	1	1	042.3110.101
	Stopper with trigger, plastic	1	1	042.3109.071
	Flat countersunk head chipboard screw, 4x60 mm (5/32"x2 3/8"), steel, zinc-plated	2	2	600.0000.139
	Cross recessed flat countersunk head screw, M4x50 mm (5/32"x1 31/32"), steel, zinc-plated	2	2	600.0000.492
	Soft close, bottom running, 10–60 kg (22 to 132 lbs.), plastic		1	042.3107.072

Wall compensation profiles


		mm (inch)	No.
	Wall compensation profile, with sealing profile gray, aluminum, anodized	2,500 (8' 2 7/16")	042.3064.071
		3,000 (9' 10 1/8")	042.3064.072

Intermediate stop

**(cannot be used in conjunction with
soft closing mechanism)**

		No.
	Intermediate stop, plastic, gray	042.3031.071

Soft close

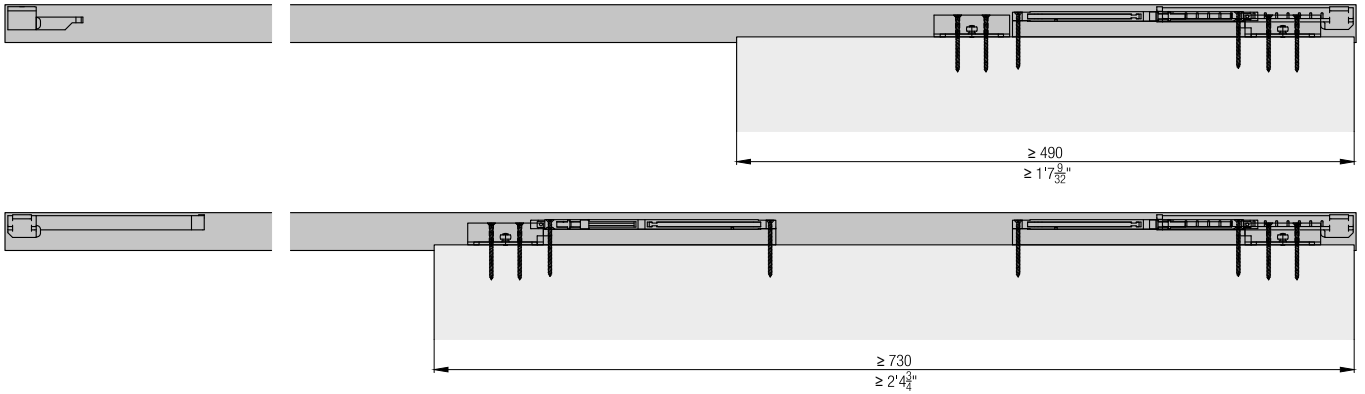

Accessories



– Hawa Divido overview from page 535

Planning/execution





Further information about the product can be found on www.hawa.com.


Fitting for bottom-running wooden doors up to 80 kg (176 lbs.), with surface or recess mounted running track. System for sloping ceilings.

Product highlights


-  **Flexibility** Two track systems can also be implemented in sloping ceilings as room dividers
-  **Productivity** Multi-track guide and running tracks reduce installation cost

Technical specifications







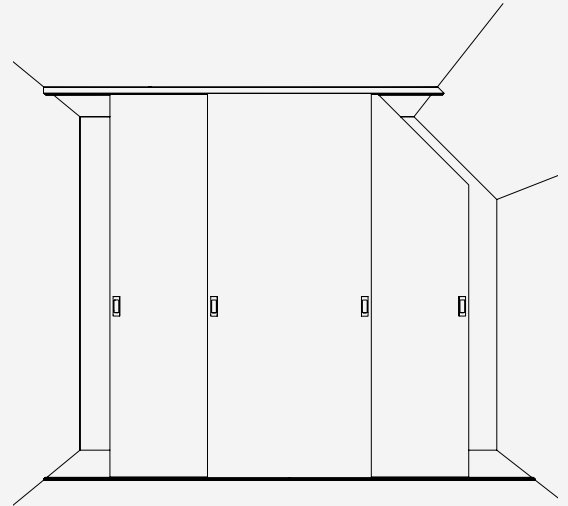

-  Max. 80 kg (176 lbs.)
-  Max. 2400 mm (7' 10 7/16")
-  Max. 2000 mm (6' 6 3/4")
-  28–30 mm (1 3/32" to 1 3/16")

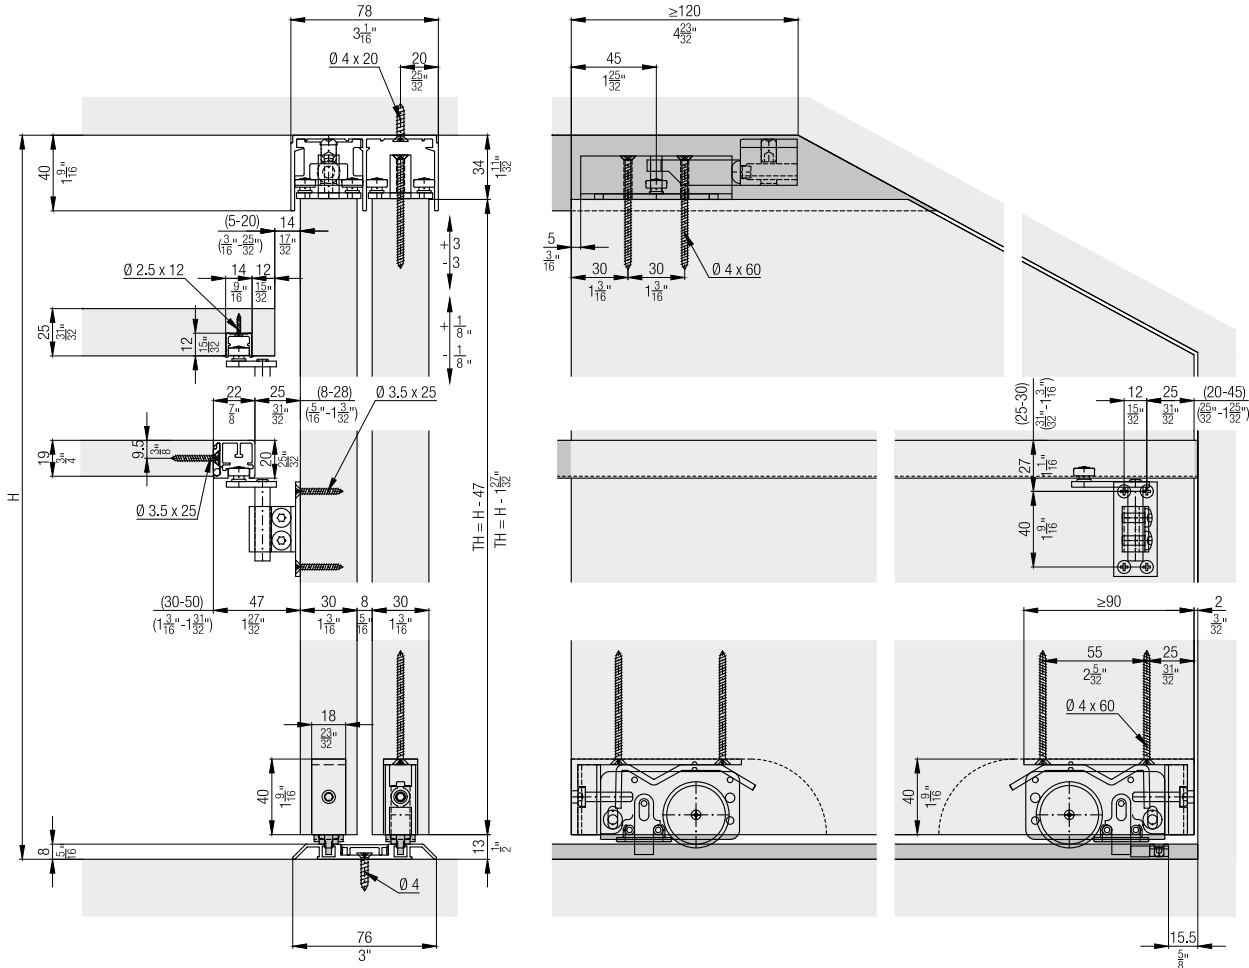





Installation examples







Set for 1 wooden door up to 80 kg (176 lbs.)

		No.	
Hawa Divido 80 H, for 1 door		042.3026.075	
		042.3026.075	No.
Set consisting of:			
	Running gear, bottom running, steel	2	042.3018.071
	Adapter for wooden door, plastic, anthracite	2	042.3036.001
	Flat countersunk head chipboard screw, 4x60 mm (5/32"x2 3/8"), steel, zinc-plated	4	600.0000.139
	Stopper to running track Hawa Divido 80, plastic, grey	2	042.3008.071
	Soft closing gum, plastic, grey	2	042.0126.001
	Track end piece, plastic, grey	1	042.3046.001
	Set top guide	1	042.3032.172
	Stopper to guide track, plastic, grey	2	042.3012.071

Runner set intermediate shelf

		No.	
Hawa Divido 80 H, DS 3, for 1 wooden or aluminum frame door		042.3048.071	
		042.3048.071	No.
Set consisting of:			
	Guide roller sloping ceiling, steel, zinc-plated	1	042.0129.171
	Bracket sloping ceiling, aluminum	1	042.0130.971
	Stopper guide, plastic, grey	1	040.3007.071
	Thread rolling rounded head screw, M4x8 mm (5/32"x5/16"), steel, zinc-plated	4	762.7007.108


Fixing set for intermediate shelf guide track

		No.	
Fixing for running and guide track, for H DS 3		042.3065.071	
		042.3065.071	No.
Set consisting of:			
	Safety clip, zinc die-cast, grey	1	040.3090.001
	Fixing clip for running/guiding rails, plastic, grey	14	040.3084.001
	Safety pin 4x25 mm (5/32"x5/32"), steel, 4-piece set	1	098.0032.101
	Cover cap set, plastic, grey, 4-piece set	1	040.0142.001



Running tracks
(overview on page 535)

		mm (inch)	No.
	Running track, aluminum, anodized, flush mounted	6,000 (19' 8 7/32")	042.3089.600
		cut to size	042.3089.990
	Single running track for 042.3039., aluminum, anodized	2,500 (8' 2 7/16")	042.3037.250
		3,500 (11' 5 25/32")	042.3037.350
		6,000 (19' 8 7/32")	042.3037.600
		cut to size	042.3037.990
	Mounting track for 042.3037., aluminum, anodized	6,000 (19' 8 7/32")	042.3039.600
		cut to size	042.3039.990
	Single running track, aluminum, anodized, surface mounted	6,000 (19' 8 7/32")	042.3040.600
		cut to size	042.3040.990
	Double running track, aluminum, anodized, pre-drilled, surface mounted	6,000 (19' 8 7/32")	042.3041.600
		cut to size	042.3041.990
	Single running track, for glue fixing, aluminum, anodized, surface mounted	6,000 (19' 8 7/32")	042.3080.600
		cut to size	042.3080.990
	Double running track, aluminum, anodized, pre-drilled, surface mounted	6,000 (19' 8 7/32")	042.3081.600
		cut to size	042.3081.990
	Clip cover for 042.3039./042.3041./042.3081./042.3082., aluminum, anodized	6,000 (19' 8 7/32")	042.3038.600
		cut to size	042.3038.990



Track end piece set for single running tracks

	No.
	042.3090.081

Guide tracks

		mm (inch)	No.
	Single guide track, aluminum, anodized	2,500 (8' 2 7/16")	042.3049.250
		3,500 (11' 5 25/32")	042.3049.350
		6,000 (19' 8 7/32")	042.3049.600
		cut to size	042.3049.990
	Double guide track, aluminum, anodized, flush mounting	2,500 (8' 2 7/16")	042.3011.250
		3,500 (11' 5 25/32")	042.3011.350
		6,000 (19' 8 7/32")	042.3011.600
		cut to size	042.3011.990








Guide tracks intermediate shelf

		mm (inch)	No.
	Single guide track, aluminum, anodized	2,500 (8' 2 7/16")	040.3136.250
		3,500 (11' 5 25/32")	040.3136.350
		6,000 (19' 8 7/32")	040.3136.600
		cut to size	040.3136.990
	Guide track, aluminum, pre-drilled	2,500 (8' 2 7/16")	056.3079.250
		3,500 (11' 5 25/32")	056.3079.350
		6,000 (19' 8 7/32")	056.3079.600
		cut to size	056.3079.990


Soft close

For soft closing in opening and closing direction
order 2 sets.

	No.
Soft close Hawa Divido 80, 61–80 kg (133 to 176 lbs.), 1 piece	042.3103.071
Soft close Hawa Divido 80, 10–60 kg (22 to 132 lbs.), 1 piece	042.3103.072


	042.3103.071	042.3103.072	No.
Set consisting of:			
 Soft close, bottom running, 61–80 kg (134 to 176 lbs.), plastic	1		042.3107.071
 Damper support, bottom running, plastic	1	1	042.3108.001
 Support bracket, bottom running, steel, zinc-plated	1	1	042.3110.101
 Stopper with trigger, plastic	1	1	042.3109.071
 Flat countersunk head chipboard screw, 4x60 mm (5/32"x2 3/8"), steel, zinc-plated	2	2	600.0000.139
 Cross recessed flat countersunk head screw, M4x50 mm (5/32"x1 31/32"), steel, zinc-plated	2	2	600.0000.492
 Soft close, bottom running, 10–60 kg (22 to 132 lbs.), plastic		1	042.3107.072

Wall compensation profiles


	mm (inch)	No.
	2,500 (8' 2 7/16")	042.3064.071
	3,000 (9' 10 1/8")	042.3064.072

Intermediate stop


(cannot be used in conjunction with soft closing mechanism)

	No.
 Intermediate stop, plastic, gray	042.3031.071


Installation examples running tracks

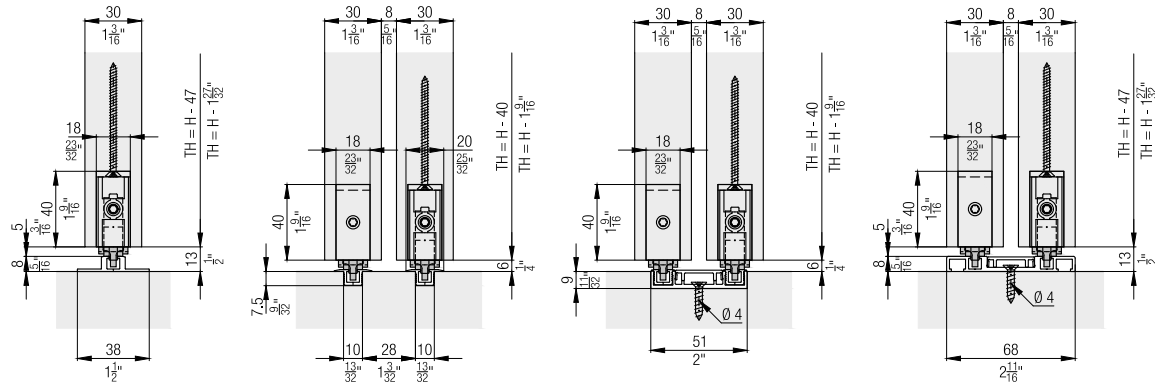


Overview running tracks

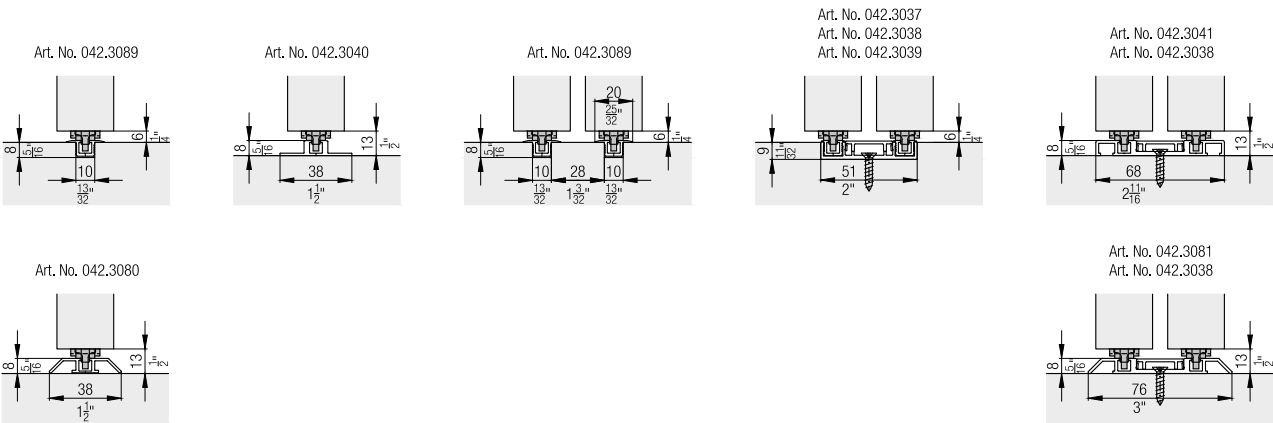


Wall compensation profile



Details of guide track on intermediate shelf

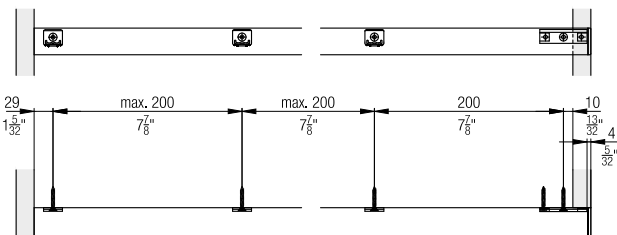

Soft close

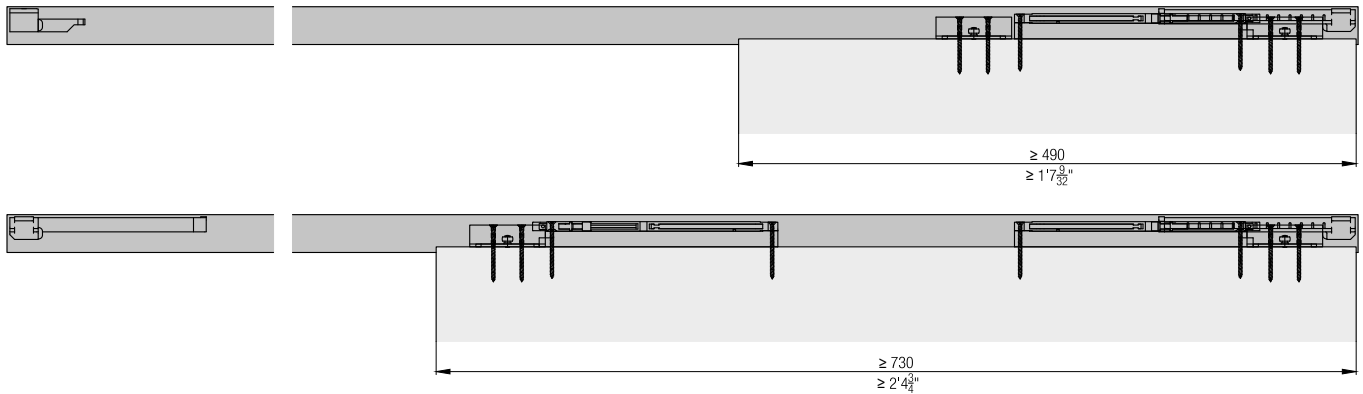

Accessories



– Hawa Divido overview from page 535

Planning/execution





Further information about the product can be found on www.hawa.com.


Fitting for top-running wooden doors up to 100 kg (220 lbs.), with surface mounted running track. With soft and self closing mechanism. Wall or ceiling mounting.

Product highlights


-  **Flexibility** Ceiling mounting with integrated clip-on panel in aluminum or wood
-  **Productivity** Multi-track guide and running tracks reduce installation cost

Technical specifications

-  Max. 100 kg (220 lbs.)
-  Max. 2400 mm (7' 10 7/16")
-  Max. 1200 mm (3' 11 1/4")
-  28–30 mm (1 3/32" to 1 3/16")

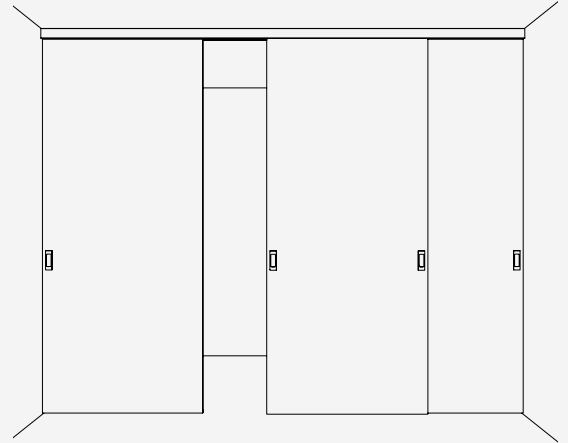




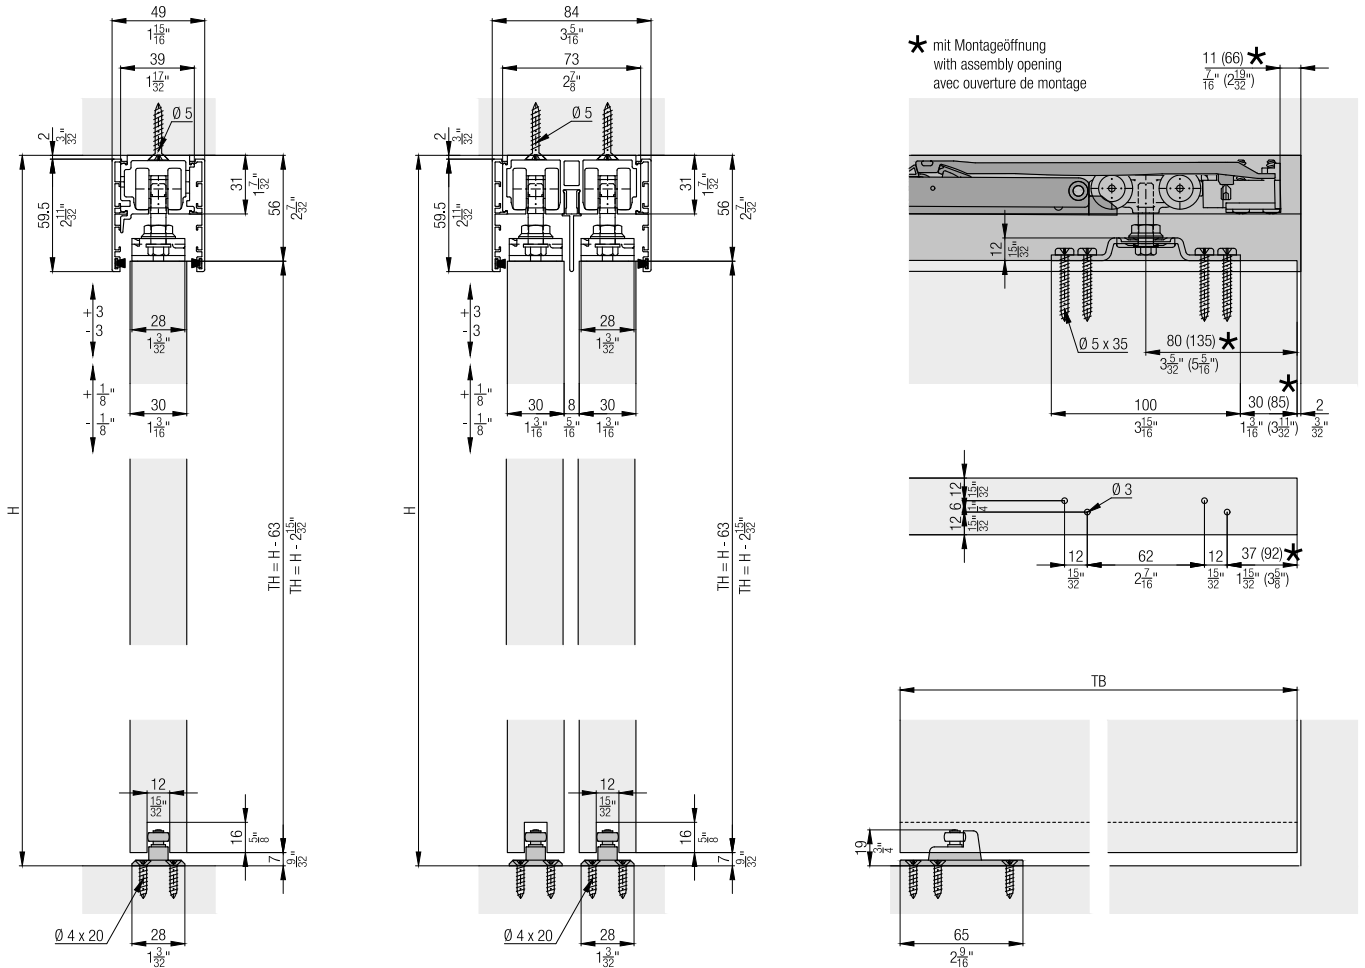




Installation examples



Set for 1 wooden door up to 100 kg (220 lbs.)

	No.
Hawa Porta/Divido 100 H/HC, for 1 door	057.3139.071




		057.3139.071	No.
Set consisting of:			

	Running gear, ball bearing, rollers plastic white	2	057.3114.071
	Stopper, with retention spring, plastic, gray	2	057.3073.072
	Suspension bolt, M8x32 mm (5/16"x1 1/4"), steel, zinc-plated	2	057.0123.104
	Hexagon locking nut, M8, steel, zinc-plated	2	768.9005.101
	Support bracket, height and lateral adjustable, steel, zinc-plated	2	057.3129.101
	Pan head screw, 5x35 mm (3/16"x1 3/8"), steel, zinc-plated	8	766.6051.135
	Bottom guide, with roller, adjustable, plastic, anthracite	1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	4	766.5042.120


Running tracks

		mm (inch)	No.
	Combi running track, aluminum, pre-drilled	2,000 (6' 6 3/4 ")	057.3048.200
		2,500 (8' 2 7/16")	057.3048.250
		3,500 (11' 5 25/32")	057.3048.350
		6,000 (19' 8 7/32")	057.3048.600
		cut to size	057.3048.990
	Spacer track, for wall mounting, plastic, gray	2,000 (6' 6 3/4 ")	057.3054.200
		cut to size	057.3054.990
	Double running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	042.3002.250
		3,500 (11' 5 25/32")	042.3002.350
		6,000 (19' 8 7/32")	042.3002.600
		cut to size	042.3002.990
	Triple running track, aluminum, anodized, pre-drilled	6,000 (19' 8 7/32")	042.3084.600
		cut to size	042.3084.990
	Disposable cover to running track Hawa Divido 100 / Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4 ")	057.3098.001
		cut to size	057.3098.990

Panels

		mm (inch)	No.
	Clip-on panel, aluminum, anodized	2,500 (8' 2 7/16")	042.3004.250
		3,500 (11' 5 25/32")	042.3004.350
		6,000 (19' 8 7/32")	042.3004.600
		cut to size	042.3004.990
	Intermediate panel for 042.3002./042.3084., aluminum, anodized	6,000 (19' 8 7/32")	042.3003.600
		cut to size	042.3003.990
	Brush seal, gray, in rolls	10,000 (32' 9 11/16")	053.3040.100





Clip-on components

		No.
	Clip component for wooden and aluminum panel, every 500 mm (1' 7 11/16"), aluminium, pre-drilled	057.3117.001

Soft close



For soft closing in opening and closing direction
order 2 sets.

		No.
Soft close Hawa Porta 100, Divido 100, 61–100 kg (133 to 220 lbs.), 1 piece		042.3102.071
Soft close Hawa Porta 60/100, Divido 100, 10–60 kg (22 to 132 lbs.), 1 piece		042.3102.072

		042.3102.071	042.3102.072	No.
Set consisting of:				
	Soft close, top running, 61–100 kg (133 to 220 lbs.), plastic	1		042.3106.071
	Trigger for soft close in buildings, zinc die casting	1	1	042.3105.001
	Screw set soft close	1	1	600.0000.566
	Soft close, top running, 10–60 kg (22 to 132 lbs.), plastic		1	042.3106.072




Cover for assembly opening

		No.
Cover cap to assembly opening, 1-piece set		042.3114.071

		042.3114.071	No.
Set consisting of:			
	Cover cap assembly opening, plastic, gray	1	042.0172.001
	Screw set soft close	1	600.0000.566




Panel end component set, 49 mm (1 15/16"), aluminum, ceiling mounting

		No.
Panel end component set for 057.3048., 49x60 mm (1 15/16x2 3/8"), aluminum, anodized, for ceiling mounting		042.3028.071


		042.3028.071	No.
Set consisting of:			
	Panel end component, 49 mm (1 15/16"), aluminum, anodized	1	042.3028.901
	Bracker connector, steel, zinc-plated	2	057.3051.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	011.0101.171

Panel end component set, 51 mm (2"), aluminum, wall mounting


		No.
Panel end component set for 057.3048., 51x60 mm (2"x2 3/8"), aluminum, anodized, for wall mounting		042.3028.075

		042.3028.075	No.
Set consisting of:			
	Panel end component, 51 mm (2"), aluminum, anodized	1	042.3028.905
	Bracker connector, steel, zinc-plated	2	057.3051.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	011.0101.171




Wall compensation profiles

		mm (inch)	No.
	Wall compensation profile, with sealing profile gray, aluminum, anodized	2,500 (8' 2 7/16")	042.3064.071
		3,000 (9' 10 1/8")	042.3064.072


Bottom guide set for wall mounting

		No.
	Set bottom guide for wall mounting, with roller	057.3128.171


Accessories

		No.
	Routing jig for assembly opening	042.3118.071
	Groove cutter to routing jig, Ø= 10 mm (13/32"), hard metal	600.0000.309
	Track cleaner, plastic, blue	057.3099.071


Further installation examples

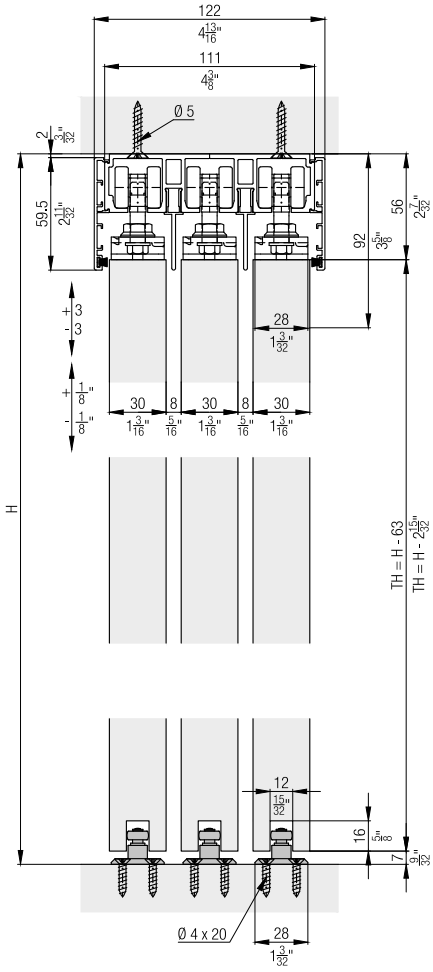


Wall mounting

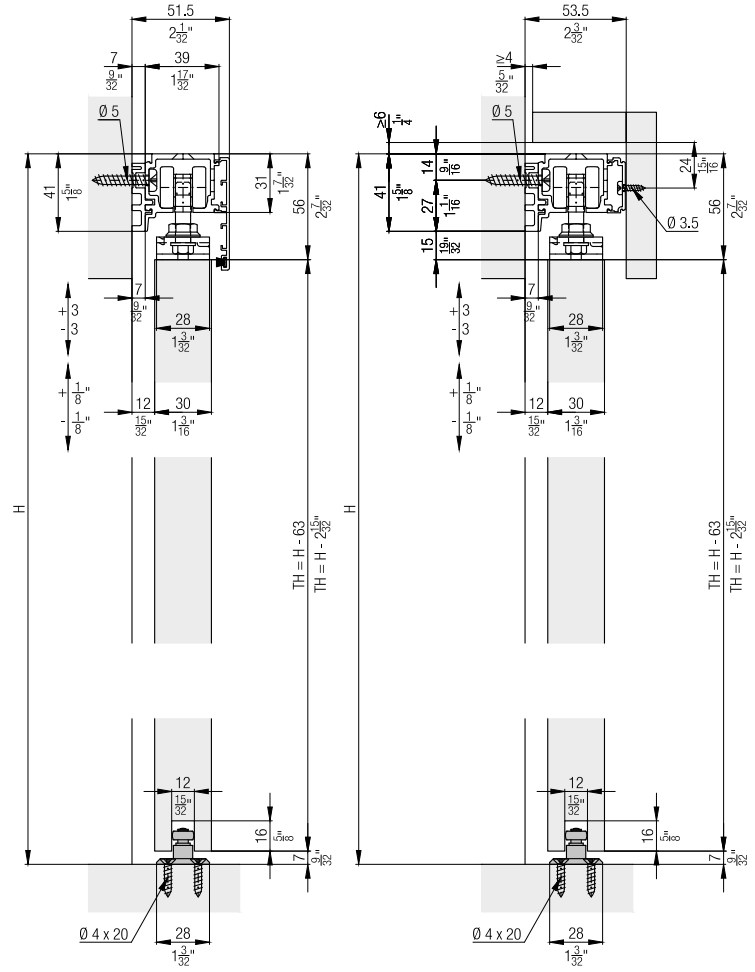


Calculations

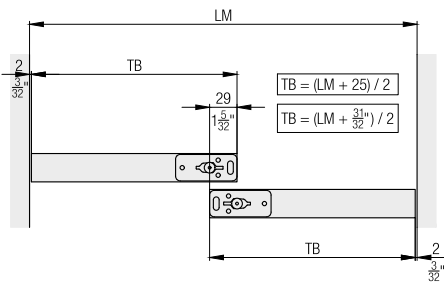


Wall bracket bottom guide

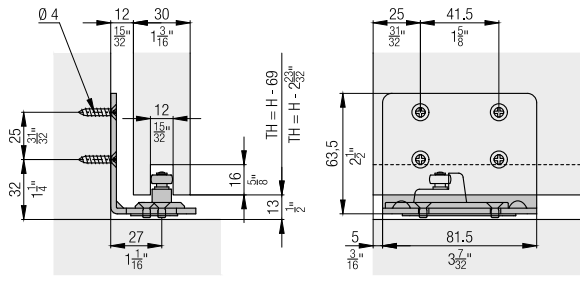

Calculations of clip-on panels

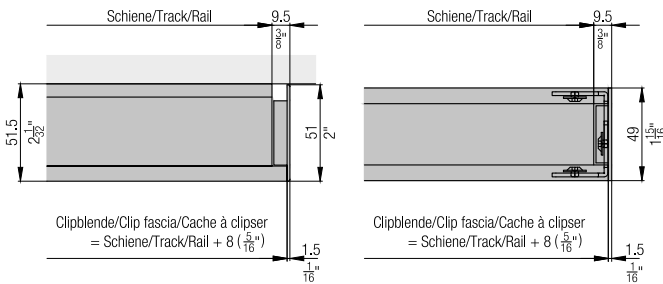

Wall compensation profile



Soft close

Beidseitig gedämpfte Ausführungen ohne stirnseitigen Zugang erfordern zwei Montageöffnungen.
Versions with soft closing mechanism at both sides without access from the leading edge require two assembly openings.
Les versions avec amortissement bilatéral sans accès frontal exigent deux ouvertures de montage.

*	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/H/C	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 60/100 HM/HMD/HMT	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 100 G/GU/GM/GMT	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 100 GF	1' 6 ²⁹ / ₃₂ "			2' 4 ³ / ₄ "		
Hawa Porta 100 GW/GWF	1' 8 ⁵ / ₃₂ "	1' 9 ¹¹ / ₃₂ "	1' 11 ¹ / ₄ "	2' 6"	2' 6 ²⁹ / ₃₂ "	2' 7 ³ / ₁₆ "
Hawa Porta 100 GMD	1' 7 ⁷ / ₃₂ "	1' 9 ⁷ / ₃₂ "	1' 11 ¹ / ₄ "	2' 5 ¹ / ₁₆ "	2' 7 ¹ / ₁₆ "	2' 7 ³ / ₁₆ "
Hawa Divido 100 H/HM/GR	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Divido 100 GRM	1' 8 ⁵ / ₃₂ "	1' 10 ¹¹ / ₃₂ "	1' 0 ¹ / ₂ "	2' 6"	2' 8 ⁵ / ₃₂ "	2' 10 ¹¹ / ₃₂ "

Dimensions: ≥ 320 , $\geq 1' - 19\frac{19}{32}"$, $Z = \geq 535$, $Z = \geq 1' - 9\frac{1}{16}"$

*	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/H/C	480	535	590	730	785	840
Hawa Porta 60/100 HM/HMD/HMT	480	535	590	730	785	840
Hawa Porta 100 G/GU/GM/GMT	480	535	590	730	785	840
Hawa Porta 100 GF	480			730		
Hawa Porta 100 GW/GWF	512	542	590	762	792	840
Hawa Porta 100 GMD	488	539	590	738	789	840
Hawa Divido 100 H/HM/GR	480	535	590	730	785	840
Hawa Divido 100 GRM	512	567	622	762	817	872

Dimensions: ≥ 570 , $\geq 1' - 10\frac{7}{16}"$, $Z = \geq 840$, $Z = \geq 2' - 9\frac{1}{16}"$

Montageöffnung assembly opening ouverture de montage

Dimensions: ≥ 62 , $\geq 2\frac{7}{16}"$

*	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/H/C	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 60/100 HM/HMD/HMT	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 100 G/GU/GM/GMT	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 100 GF	1' 6 ²⁹ / ₃₂ "			2' 4 ³ / ₄ "		
Hawa Porta 100 GW/GWF	1' 8 ⁵ / ₃₂ "	1' 9 ¹¹ / ₃₂ "	1' 11 ¹ / ₄ "	2' 6"	2' 6 ²⁹ / ₃₂ "	2' 7 ³ / ₁₆ "
Hawa Porta 100 GMD	1' 7 ⁷ / ₃₂ "	1' 9 ⁷ / ₃₂ "	1' 11 ¹ / ₄ "	2' 5 ¹ / ₁₆ "	2' 7 ¹ / ₁₆ "	2' 7 ³ / ₁₆ "
Hawa Divido 100 H/HM/GR	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Divido 100 GRM	1' 8 ⁵ / ₃₂ "	1' 10 ¹¹ / ₃₂ "	1' 0 ¹ / ₂ "	2' 6"	2' 8 ⁵ / ₃₂ "	2' 10 ¹¹ / ₃₂ "

Dimensions: ≥ 320 , $\geq 1' - 19\frac{19}{32}"$, $Z = \geq 480$, $Z = \geq 1' - 6\frac{29}{32}"$

*	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/H/C	480	535	590	730	785	840
Hawa Porta 60/100 HM/HMD/HMT	480	535	590	730	785	840
Hawa Porta 100 G/GU/GM/GMT	480	535	590	730	785	840
Hawa Porta 100 GF	480			730		
Hawa Porta 100 GW/GWF	512	542	590	762	792	840
Hawa Porta 100 GMD	488	539	590	738	789	840
Hawa Divido 100 H/HM/GR	480	535	590	730	785	840
Hawa Divido 100 GRM	512	567	622	762	817	872

Dimensions: ≥ 570 , $\geq 1' - 10\frac{7}{16}"$, $Z = \geq 730$, $Z = \geq 2' - 4\frac{3}{4}"$

Montageöffnung assembly opening ouverture de montage

Accessories



- Hawa 4-point guidance from page 521
- Hawa stacking system from page 523
- Hawa Divido overview from page 535

Planning/execution





Further information about the product can be found on www.hawa.com.


Fitting for 2 synchronously opening wooden doors up to 100 kg (220 lbs.), with surface mounted running track. Wall or ceiling mounting.

Product highlights


-  **Flexibility** Standard applications can be extended with the Synchro option
-  **Productivity** Easy installation of the accessories

Technical specifications

-  Max. 100 kg (220 lbs.)
-  Max. 2400 mm (7' 10 7/16")
-  Max. 1200 mm (3' 11 1/4")
-  28–30 mm (1 3/32" to 1 3/16")

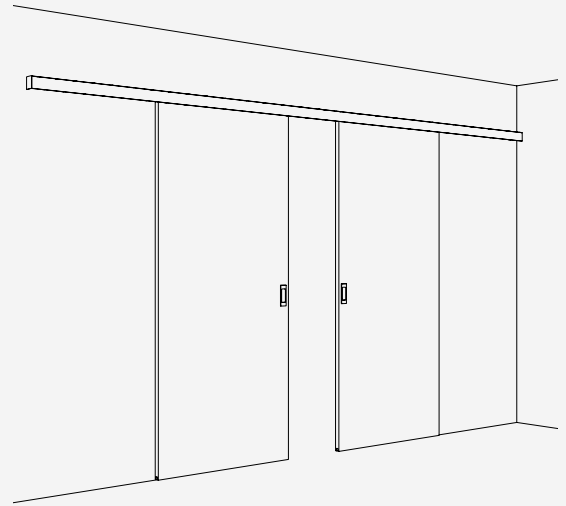





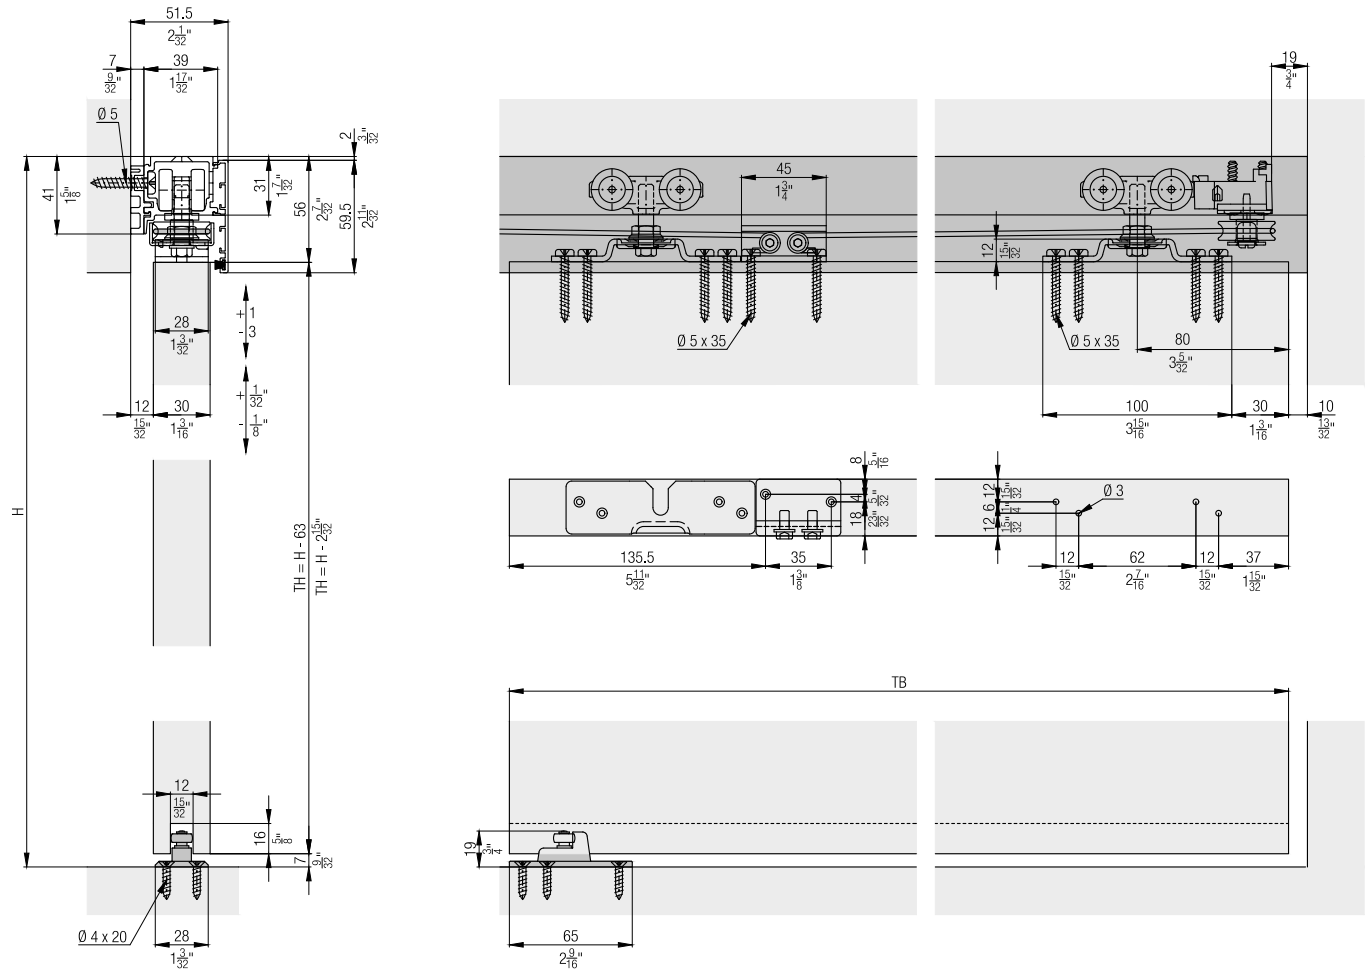



Installation examples



Set for 1 wooden door up to 100 kg (220 lbs.) (order 2x)

	No.
Hawa Porta/Divido 100 H/HC, for 1 door	057.3139.071


Set consisting of:

		057.3139.071	No.
	Running gear, ball bearing, rollers plastic white	2	057.3114.071
	Stopper, with retention spring, plastic, gray	2	057.3073.072
	Suspension bolt, M8x32 mm (5/16"x1 1/4"), steel, zinc-plated	2	057.0123.104
	Hexagon locking nut, M8, steel, zinc-plated	2	768.9005.101
	Support bracket, height and lateral adjustable, steel, zinc-plated	2	057.3129.101
	Pan head screw, 5x35 mm (3/16"x1 3/8"), steel, zinc-plated	8	766.6051.135
	Bottom guide, with roller, adjustable, plastic, anthracite	1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	4	766.5042.120




Synchro set

	No.
Hawa Porta 60/100 H/HC and Hawa Divido 100 H, Synchro, for 2 doors	042.3027.072


Set consisting of:

		mm (inch)	042.3027.072	No.
	Deviating roller, ball bearing		2	055.0101.001
	Cable safety, steel, zinc-plated		2	056.0124.101
	Clamp piece, steel, zinc-plated		2	057.0113.101
	Kevlar cable, D= 2.5 mm (3/32")	10,000 (32' 9 11/16")	1	752.0059.104
	Flat washer, M5, 5.3/15/2 mm (3/16"/19/32"/3/32"), steel, zinc-plated		2	600.0000.681
	Rounded head screw, 5x25 mm (3/16"x31/32"), steel, zinc-plated		2	762.9455.000
	Head cap screw, with flange, M5x10 mm (3/16"x13/32"), steel, zinc-plated		4	762.9365.000
	Pan head screw, 5x35 mm (3/16"x1 3/8"), steel, zinc-plated		4	766.6051.135



Running tracks

		mm (inch)	No.
	Combi running track, aluminum, pre-drilled	2,500 (8' 2 7/16")	057.3048.250
		3,500 (11' 5 25/32")	057.3048.350
		6,000 (19' 8 7/32")	057.3048.600
		cut to size	057.3048.990
	Spacer track, for wall mounting, plastic, gray	2,000 (6' 6 3/4")	057.3054.200
		cut to size	057.3054.990
	Disposable cover to running track Hawa Divido 100 / Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4")	057.3098.001
		cut to size	057.3098.990

Clip-on components

		No.
	Clip component for wooden and aluminum panel, every 500 mm (1' 7 11/16"), aluminium, pre-drilled	057.3117.001




Panels

		mm (inch)	No.
	Clip-on panel, aluminum, anodized	2,500 (8' 2 7/16")	042.3004.250
		3,500 (11' 5 25/32")	042.3004.350
		6,000 (19' 8 7/32")	042.3004.600
		cut to size	042.3004.990
	Brush seal, gray, in rolls	10,000 (32' 9 11/16")	053.3040.100

Panel end component set, 51 mm (1 15/16"), aluminum, ceiling mounting

		No.
Panel end component set for 057.3048., 49x60 mm (1 15/16x2 3/8"), aluminum, anodized, for ceiling mounting		042.3028.071




Set consisting of:

		042.3028.071	No.
	Panel end component, 49 mm (1 15/16"), aluminum, anodized	1	042.3028.901
	Bracker connector, steel, zinc-plated	2	057.3051.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	011.0101.171


Panel end component set, 51 mm (2"), aluminum, wall mounting

		No.
Panel end component set for 057.3048., 51x60 mm (2"x2 3/8"), aluminum, anodized, for wall mounting		042.3028.075


Set consisting of:

		042.3028.075	No.
	Panel end component, 51 mm (2"), aluminum, anodized	1	042.3028.905
	Bracker connector, steel, zinc-plated	2	057.3051.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	011.0101.171

Bottom guide set for wall mounting



		No.
	Set bottom guide for wall mounting, with roller	057.3128.171

Accessories





		No.
	Track cleaner, plastic, blue	057.3099.071


Fitting for top-running wooden doors up to 100 kg (220 lbs.), with surface mounted running track. With soft and self closing mechanism. Ceiling mounting. Minimal installation height.

Product highlights


-  **Flexibility** Ceiling-integrated or surface-mounted installation with the same system
-  **Productivity** Tool-less door mounting

Technical specifications

-  Max. 100 kg (220 lbs.)
-  Max. 2400 mm (7' 10 7/16")
-  Max. 1200 mm (3' 11 1/4")
-  28–30 mm (1 3/32" to 1 3/16")

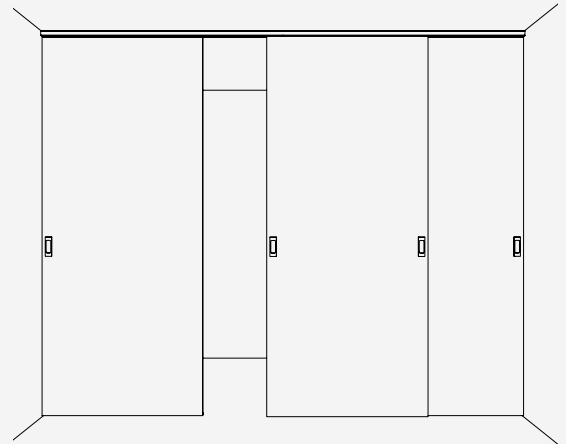

Installation examples

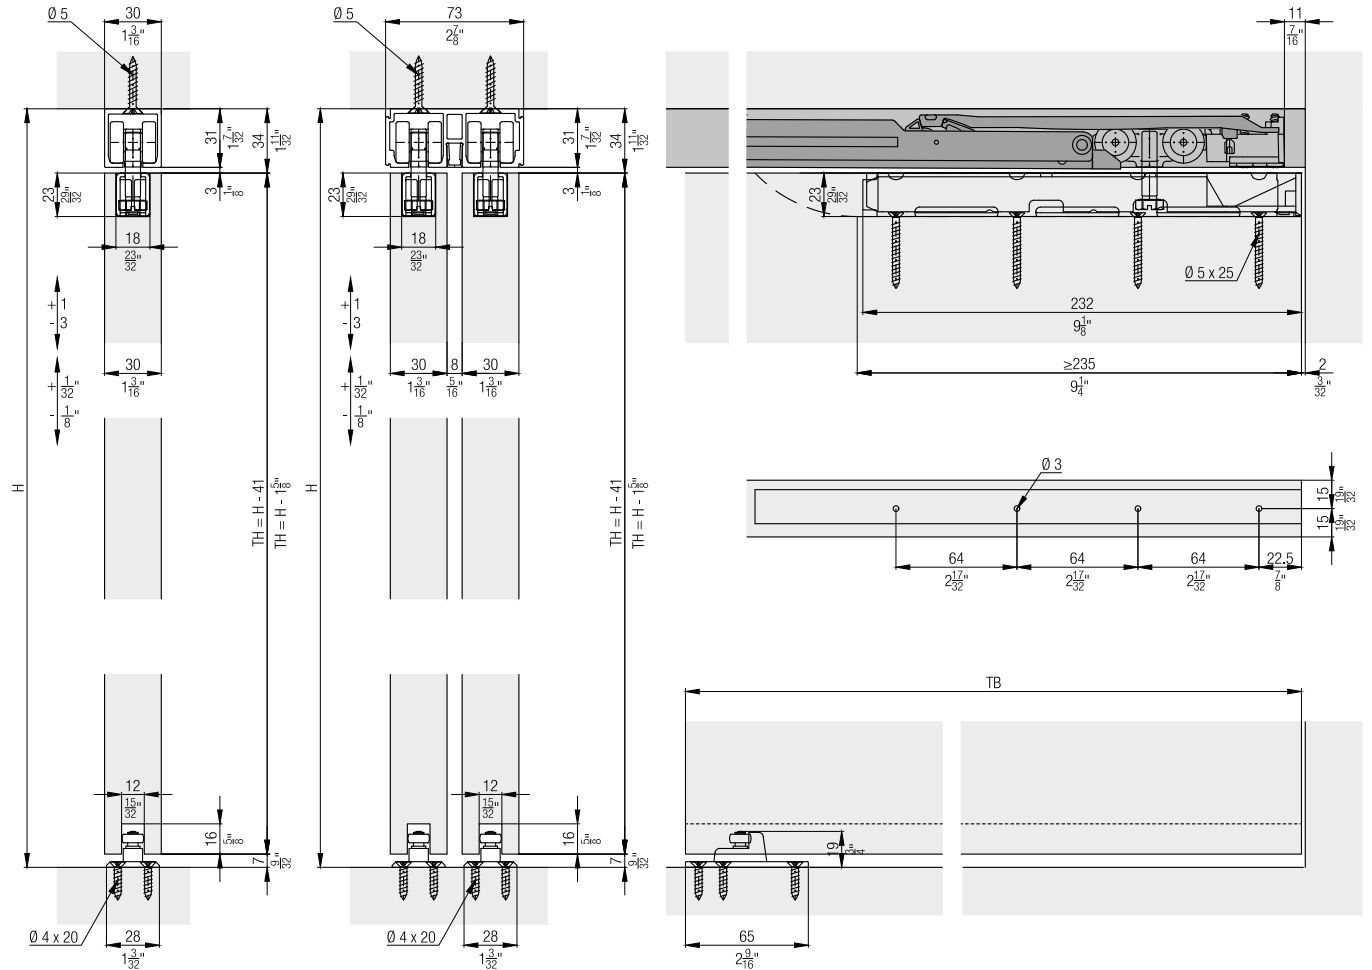







Set for 1 wooden door up to 100 kg (220 lbs.)

	No.
Hawa Porta 100 HM/HMD and Hawa Divido 100 HM, minimal installation height, for 1 door	057.3133.071


Set consisting of:

	057.3133.071	No.
 Running gear, ball bearing, rollers plastic white	2	057.3114.071
 Stopper, with retention spring, plastic, gray	2	057.3073.072
 Hexagon head screw, M8x36 mm (5/16" x 1 13/32"), steel, zinc-plated	2	042.0165.101
 Cover cap, plastic, grey	2	600.0000.533
 Running gear holder, plastic, anthracite	2	042.0167.001
 Housing, steel, zinc-plated	2	042.0166.101
 Countersunk head screw, 4x40 mm (5/32" x 1 9/16"), steel, zinc-plated	8	766.5040.140
 Bottom guide, with roller, adjustable, plastic, anthracite	1	057.3120.071
 Countersunk head screw, 4x20 mm (5/32" x 25/32"), steel, zinc-plated	4	766.5042.120

Running tracks

		mm (inch)	No.
	Running track, aluminum, pre-drilled	2,000 (6' 6 3/4 ")	057.3016.200
		2,500 (8' 2 7/16 ")	057.3016.250
		6,000 (19' 8 7/32 ")	057.3016.600
		cut to size	057.3016.990
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	057.3016.201
		2,500 (8' 2 7/16 ")	057.3016.251
		6,000 (19' 8 7/32 ")	057.3016.601
		cut to size	057.3016.991
	Running track, with assembly opening, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16 ")	057.3016.256
	Double running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16 ")	042.3002.250
		3,500 (11' 5 25/32 ")	042.3002.350
		6,000 (19' 8 7/32 ")	042.3002.600
		cut to size	042.3002.990
	Triple running track, aluminum, anodized, pre-drilled	6,000 (19' 8 7/32 ")	042.3084.600
		cut to size	042.3084.990
	Disposable cover to running track Hawa Divido 100 / Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4 ")	057.3098.001
		cut to size	057.3098.990

Panels





		mm (inch)	No.
	Cover profile for 042.3002./042.3084., aluminum, anodized	6,000 (19' 8 7/32 ")	042.3086.600
		cut to size	042.3086.990

Soft close

For soft closing in opening and closing direction
order 2 sets.

	No.
Soft close Hawa Porta 100, Divido 100, 61–100 kg (133 to 220 lbs.), 1 piece	042.3102.071
Soft close Hawa Porta 60/100, Divido 100, 10–60 kg (22 to 132 lbs.), 1 piece	042.3102.072



Set consisting of:

	042.3102.071	042.3102.072	No.
 Soft close, top running, 61–100 kg (133 to 220 lbs.), plastic	1		042.3106.071
 Trigger for soft close in buildings, zinc die casting	1	1	042.3105.001
 Screw set soft close	1	1	600.0000.566
 Soft close, top running, 10–60 kg (22 to 132 lbs.), plastic		1	042.3106.072


Cover for assembly opening

	No.
Cover cap to assembly opening, 1-piece set	042.3114.071


Set consisting of:

	042.3114.071	No.
 Cover cap assembly opening, plastic, gray	1	042.0172.001
 Screw set soft close	1	600.0000.566




Wall compensation profiles

	mm (inch)	No.
	2,500 (8' 2 7/16")	042.3064.071
	3,000 (9' 10 1/8")	042.3064.072


Bottom guide set for wall mounting

	No.
 Set bottom guide for wall mounting, with roller	057.3128.171


Accessories

	No.
 Routing jig for assembly opening	042.3118.071
 Groove cutter to routing jig, Ø= 10 mm (13/32"), hard metal	600.0000.309
 Track cleaner, plastic, blue	057.3099.071


Further installation examples

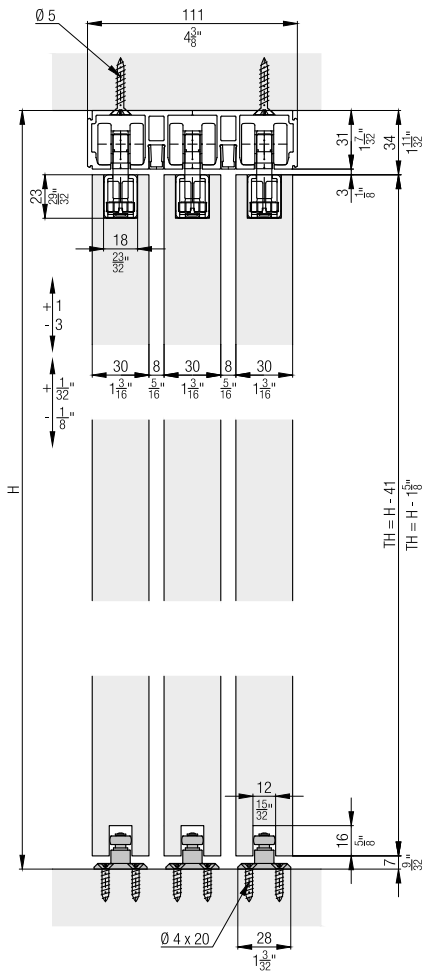

Calculations of running track length

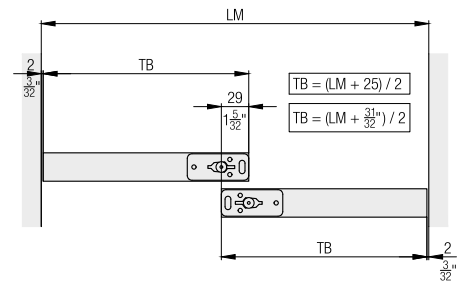

Wall compensation profile





Everything for more openness and transparency

Solutions for glass applications

The natural aesthetics of glass, combined with the well thought-out functionality of our sliding technology: These are the optimum prerequisites for inspirational applications in buildings. No wonder that increasing numbers of interior architects and designers are accepting the invitation to provide visual and technical highlights with an invisible material.



Glass sliding doors

They provide light, spaciousness and transparency: Sliding doors made from glass make rooms look brighter, more spacious and bigger. It doesn't just feel like there's more room: Since the swivelling area of traditional doors is done away with, they make sense for practical reasons and also from an aesthetic point of view. Particularly since the sliding solutions from Hawa Sliding Solutions easily adapt to any requirement and any situation with their unsurpassed product range width and depth.



Discover our fitting solutions for glass sliding doors from **Page 294**

Sliding glass walls

Rooms can be partitioned and separated as elegantly as this: The glass wall solutions from Hawa Sliding Solutions combine maximum adaptability with an elegant design and excellent sliding characteristics. Invisible technology integrated in the running track, elegant flush-fitting constructions and gentle self and soft closing of the doors. Then there are numerous options for synchronized and special solutions, such as those for making optimum use of sloping ceilings: these are just some of the crystal clear advantages.



Discover our fitting solutions for glass sliding walls from **Page 482**

